

MORTAR SPRAYER ENDUIVIT 3

- For rendering façade mortars

Wall



P 380

Ceiling



P 390

SPRAYING
AND POINTING

	P 380	P 390
Weight (kg)	1,6	1,6
Air consumption cfm	10 to 28	10 to 28
Pressure of use psi	35 to 65	35 to 65

An output of 20 to 25 m² per hour

Plates		Nozzles		Plugs
3 holes ø 20	51 01 068	long ø 4	51 01 056	-
3 holes ø 14	51 01 069	short ø 2,7	51 01 058	-
1 hole ø 14	51 01 070	short ø 4	51 01 057	51 01 013
1 hole tyrolienne	P 239	long ø 4	51 01 056	51 01 013
Jointing plate	P 238	long ø 4	51 01 056	51 01 013




Plate 3 holes ø 20
Long nozzle ø 4





Plate 3 holes ø 14
Nozzle ø 2,7

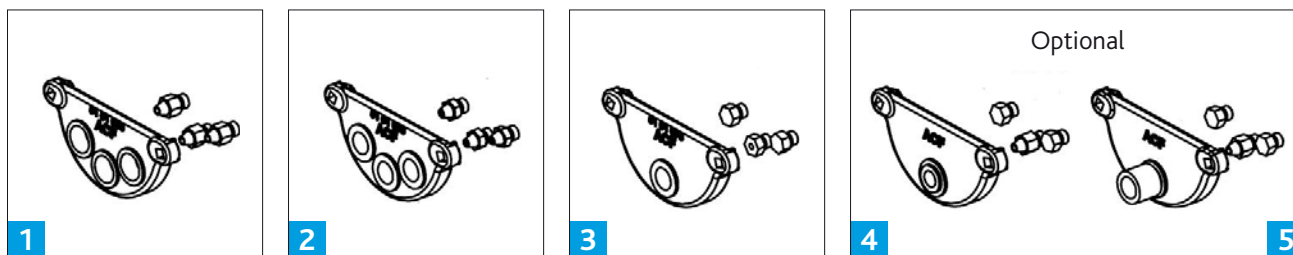


Plate 1 hole ø 14
Short nozzle ø 4



Possibility to load
up to 100 mm

Accessories for Enduivit 3



Works	Plates	Nozzles Nb Ø		Plugs	Pressure
1 Rough coating	3 holes ø 20	3	4 long	0	65 psi
2 Middle parget	3 holes ø 14	3	2,7 short	0	60 psi
3 Thin parget	1 hole ø 14	1	4 short	2	50 psi
4 Tyrolienne	1 hole ø 14	1	2,7 short	2	35 psi
5 Jointing plate	1 hole ø 14	1	4 long	2	35 psi

Complete unit for façade works



Air compressor CM4HL

HONDA GX 200

Air flow : 30 m³/h (18 CFM)

or 500 lit/mn at 7 bars (100 PSI)

Pull rope start and 1 quick coupling exit



ENDUVIT 3 with box P 381

Includes 1 P 380, 1 set of plates and plugs, 10 m of air hoses, 1 metallic box



Air pressure regulator

P 100

Your nearest dealer:



LE SPÉCIALISTE

B.P. 23 - 69380 LOZANNE - FRANCE

Tél. : +33 (0)4 78 43 62 62

Fax : +33 (0)44 78 43 69 28

E-mail : acf@acf-france.com

www.acf-france.com